

Classic X86 Mini PC

It adopts all-aluminum alloy structure, fanless and totally enclosed design, light and compact, with low power consumption. It is an industrial product specially designed for a variety of environments. It has rich interfaces, supports expansion, can meet the access of a variety of external devices, and supports 12V-36V wide voltage power supply; The complete machine has good scalability, practicability and EMC compatibility, and is widely used in industrial control, military industry, communication, power and network and other automation fields.

Features >>

- Delicate and compact appearance, convenient installation
- Self-developed X86 architecture motherboard with multiple options
- Fanless totally enclosed design, low power consumption of the whole machine
- High integration, realizing WiFi/Bluetooth/Ethernet triple connection
- Abundant interfaces to meet the needs of various external equipment
- Industrial protection grade, stable system operation



Model >>

Model	Processor
TPC01-WIPC	Intel Celeron J1900 quad-core 1.99GHz (Maximum 2.4GHz)



Installation >>




Desktop installation



Rack-mounted

Size >>

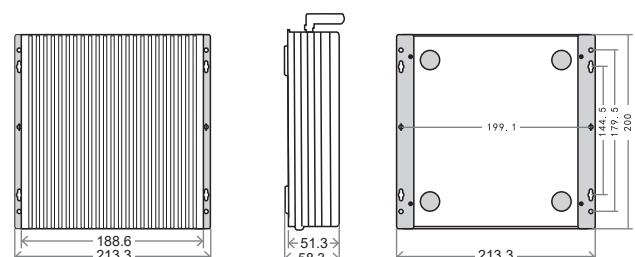

Specification >>

Configuration	
CPU	Intel Celeron J1900 quad-core 1.99GHz (Maximum 2.4GHz)
Integrated Graphics	Intel HD Graphics
Memory/RAM	4GB DDR3(optional:8GB, Supports up to 8GB)
Storage	64GB SSD (optional SSD 128GB-512GB, HDD 500GB-1T)
Wi-Fi	Support 2.4G/5G dual-band WiFi
Bluetooth	Bluetooth 4.0(optional)
Operating System	WIN7/10, Ubuntu/Centos7.4/7.8/7.9/Redhat7.4/Debian11.6
Audio chip	Onboard Realtek ALC662 HD audio decoding controller
Display chip	Intel CPU built-in display core, built-in LVDS interface, external VGA, HDMI dual display

Interface Parameter	
PowerSW	1*PowerSW
Power interface	1*Threaded DC port (Diameter: 5.5*2.5mm)
USB	4*USB 2.0, 2*USB 3.0
Ethernet	1*LAN, 10M/100M/1000M adaptive Ethernet
HDMI	1*HDMI, Supporting HDMI data output, Up to 4K
SIM	1*SIM, Supporting various formats (Depending on 3G/4G module)
VGA	1*VGA
Audio	1*Audio Out, Support Audio output
Serial port	6*COM (Default: RS232, optional: RS485)
Wi-Fi antenna	2*Wi-Fi antenna
Grounding	1*GND

Reliability Parameter	
Operating temperature	-10°C~60°C (-20°C~70°C can be customized)
Storage temperature	-20 ° C~70 ° C
Relative humidity	95% non-Condensing

Other Parameter	
Power adapter	24V/2.5A
Chassis structure	The aluminum alloy on the case surface has good seismic resistance and impact resistance
Color	Gun black
Overall size	199.5*213.1*58.3mm (length*width*height)
Operating Weight	1.9KG
Installation method	Support desktop and rack installation
Warranty	Three years (standard one year free warranty, other policies are negotiable)

I/O Interface >>

